





# FVP-1202N-C

The newly introduced Forza Zion features a unique innovation in the industry: 350° rotating outlets to easily accommodate and position all your components without obstructing other available receptacles.




The handy on/off switch also helps reduce standby power consumption. Most importantly, the FVP Voltage Protector will automatically guard your equipment against brownouts or transient spikes induced by lighting or power line failure.

The first 3-in -1 voltage protector in the market, the Zion will automatically guard your equipment against potentially damaging power fluctuations and other irregularities in the electrical supply.

- ✓  Reliable protection
- ✓  Delay timer
- ✓  Rotating outlet
- ✓  On/Off switch promotes power conservation

## Great protection with exclusive features

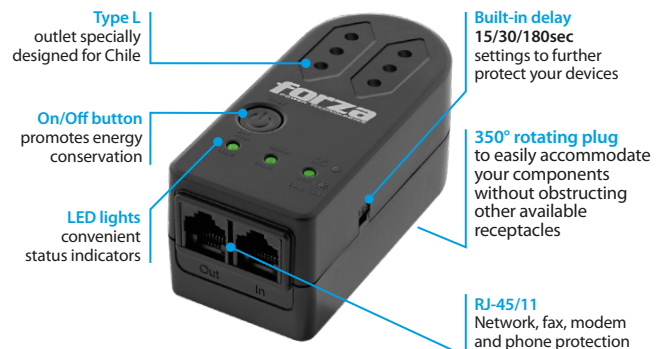

### STANDARD APPLICATIONS

- Appliances
- Refrigerators
- TV sets
- Electronics
- Game consoles
- Entertainment components

| MPN                           | FVP-1202N-C             |
|-------------------------------|-------------------------|
| <b>General</b>                |                         |
| Capacity                      | 1500W                   |
| BTUs                          | 12000                   |
| <b>Input</b>                  |                         |
| Voltage                       | 220V                    |
| Voltage range                 | 180-268VAC              |
| Frequency                     | 50/60Hz (autosensing)   |
| Loading capacity              | 7A                      |
| Joules                        | 900J                    |
| Max spike current             | 18000A                  |
| AC plug style                 | Italian (CEI 23-50)     |
| AC plug feature               | 350 degree rotation     |
| <b>Output</b>                 |                         |
| Outlet                        | 2 Italian (CEI 23-50)   |
| Voltage range                 | 180-268VAC              |
| Frequency                     | 50/60Hz                 |
| Delay timer                   | 15sec-30sec-3min        |
| <b>Data protection</b>        |                         |
| Network protection            | RJ-45                   |
| Phone/modem/fax protection    | RJ-11                   |
| <b>Visual indicators</b>      |                         |
| LED indicators                | 3                       |
| Power on                      | Green                   |
| Over voltage protection       | Green                   |
| Under voltage protection      | Green                   |
| Reconnect delay timer         | Green (blinking)        |
| <b>Environment</b>            |                         |
| Operating temperature         | 32-104°F                |
| Storage temperature           | 5-113°F                 |
| Relative humidity             | 0-95% non-condensing    |
| Audible noise                 | <40dB at one meter      |
| <b>Physical appearance</b>    |                         |
| Switch                        | Push button             |
| Housing                       | Flame retardant plastic |
| Color                         | Black                   |
| Dimensions                    | 4.3x2x1.6in             |
| Weight                        | 0.3lb                   |
| <b>Additional information</b> |                         |
| Warranty                      | Two years               |

